




**WOOLLEY FLUSH JOINT LINER TECHNICAL DATA**

**SPECIAL FEATURES**

Hook thread prevents jump out and hoop loading caused by tension loads. The elimination of hoop loading improves pressure seal under both tension and compression loading of the joint.

If you want a FLUSH-FLUSH O.D. JOINT, this is the best joint for you. It is economical, dependable, and fast running.

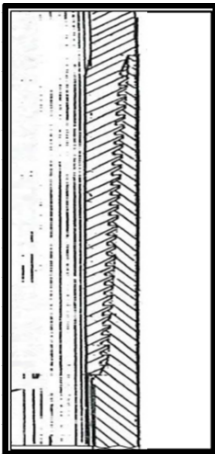


<b>3 3/4"</b>	<b>9.35 lbs/ft</b>	<b>FJ-60</b>	<b>J55</b>	<b>L80</b>	<b>P110</b>
<b><u>PIPE BODY DIMENSIONS</u></b>					
Nominal Pipe Body O.D. (in)			3.750	3.750	3.750
Nominal Pipe Body I.D. (in)			3.250	3.250	3.250
Nominal Wall Thickness (in)			0.250	0.250	0.250
Nominal Weight (lbs/ft)			-	-	-
Plain End Weight (lbs/ft)			9.35	9.35	9.35
Drift I.D. (in)			3.125	3.125	3.125
<b><u>PIPE BODY PERFORMANCE DATA</u></b>					
Minimum Pipe Body Yield Strength (lbs)			151,190	219,912	302,379
Minimum Collapse Pressure (psi)			6,800	9,100	11,500
Minimum Interl Yield Pressure (psi)			6,400	9,350	12,850
<b><u>CONNECTION DIMENSIONS AND PERF. DATA</u></b>					
Connection O.D. (in)			3.750	3.750	3.750
Pin Connection I.D. Bored (in)			3.200	3.200	3.200
Make-up Loss (in)			2.750	2.750	2.750
Critical Area (sq in)			1.667	1.667	1.667
Joint Efficiency (%)			60	60	60
Reference Minimum Parting Load (lbs)			158,000	167,000	208,000
Reference String Length (ft)			8,449	10,487	13,928
Collapse Pressure Rating (psi)			6,800	9,100	11,500
Internal Pressure Rating (psi)			6,400	9,350	12,850
Interchangeable With Weights (lbs)			-	-	-
<b><u>RECOMMENDED MAKE-UP TORQUE</u></b>					
Minimum Final Torque (ft/lbs)			800	900	900
Maximum Final Torques (ft/lbs)			1,500	1,700	1,700

The content of this Technical Data Sheet is for general information only and does not guarantee performance or imply fitness for a particular purpose, which only a competent drilling professional can determine considering the specific installation and operation parameters. Information that is printed or downloaded is no longer controlled by Woolley Tool Inc. and might not be the latest information. Anyone using the information herein does so at their own risk. To verify that you have the latest Woolley Tool, Inc. technical information, please contact at 903-984-3553 or email at [TechnicalSupport@woolleytool.com](mailto:TechnicalSupport@woolleytool.com).



SKETCH TO ILLUSTRATE THE SET UP FOR TENSILE TESTING, PARTING LOAD CAPACITY OF WOOLLEY F.J.60-H FLUSH JOINT THREAD VS. A.P.I., 8RD, L.T.C. THREADS CUT ON OPPOSITE ENDS OF EACH J OR K-55 4 1/2" O.D., 11.60# CASING TEST NIPPLE

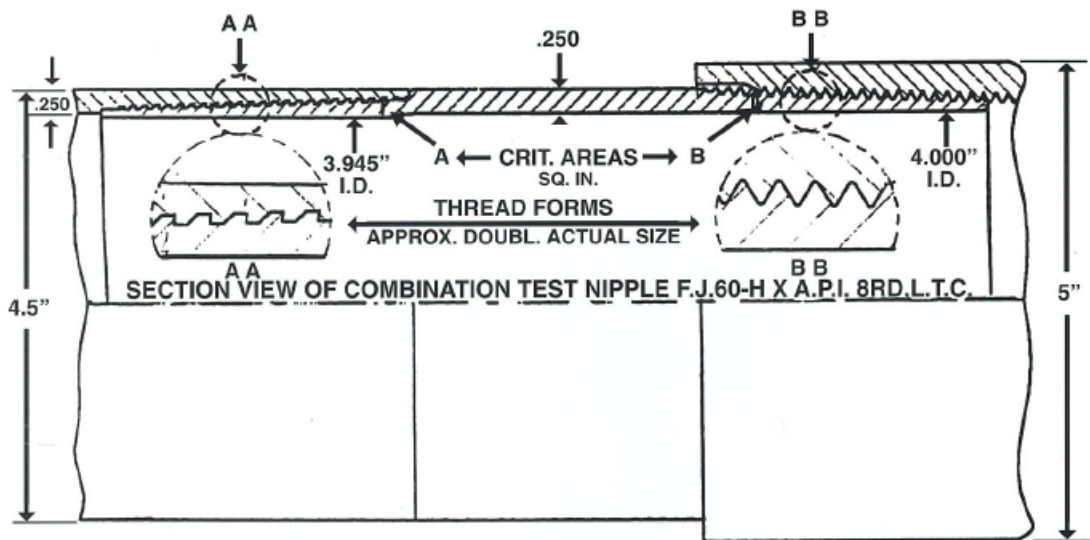

Repeated tests with above setup established two things. the A.P.I. 8rd thread always jumped out at approximately 160,000# tension, leaving the flush joint F.J.60-H undamaged and not tested near to its limit.

The setup was then changed to F.J.60-H thread on both ends of the same test nipples in order to determine parting load of the flush joint thread.

On this setup we had repeated parting loads of 196,000# with one test going to 220,000#.

On all tests to ultimate tensile on the F.J.60-H flush joint, there were no jump outs. All pins parted in critical root of the last effective pin thread.

All tension testing started at 100,000#, then increased in tensile steps of 15,000# with Hydrotest to 6,000 psi between tensile steps. There were no leaks prior to parting.